


Routes with 1.25" Innerduct for City of Cupertino

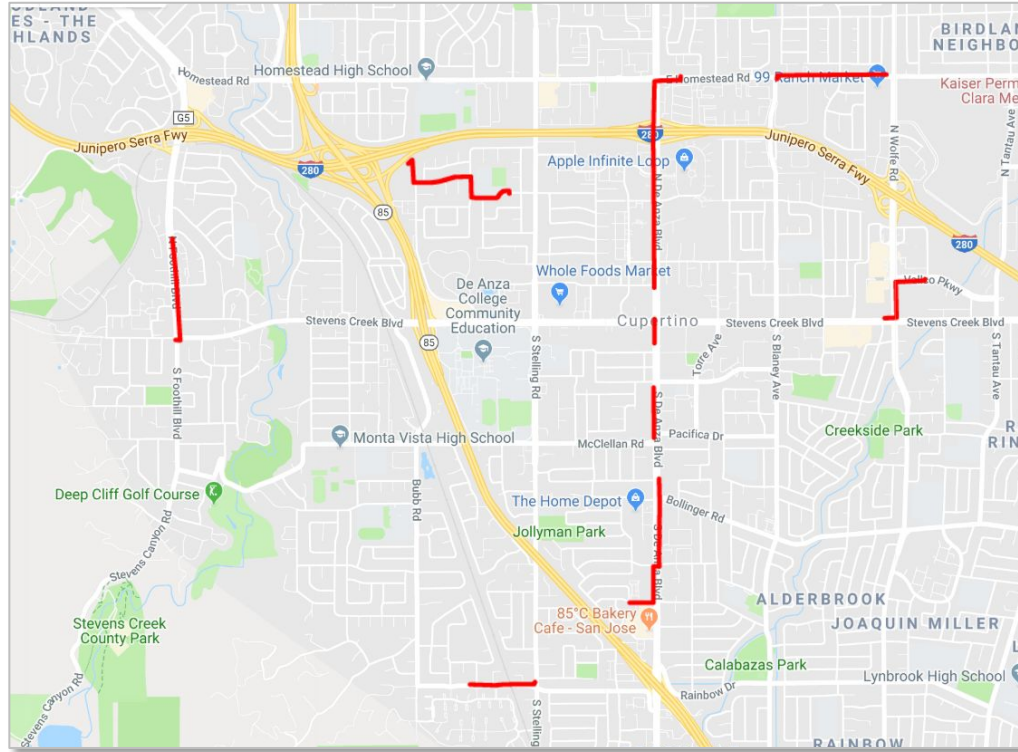

4 inch conduit – 1.25" innerduct

Based on high level design as of 5/23/19. Routes depicted may be subject to change if issues with running line prior to/during construction.

Route Descriptions

Street Name	Distance (ft)
E Homestead Rd: North De Anza Blvd. to Bluejay Dr.	650
De Anza Blvd: Homestead Rd. to Stevens Creek Blvd.	5,696
De Anza Blvd: Rodriguez Ave. to McClellan Rd.	1,104
De Anza Blvd: Kirwin Ln. to Rollingdell Dr.	2,750
N Wolfe Rd: Stevens Creek Blvd. to Valco Pkwy.	1,730
E. Homestead Rd: N. Blaney Ave. to N. Wolfe Ave.	2,483
Meteor Rd. Mary Ave.-Meteor Rd.-Greanleaf Dr.	3,292
N Foothill Blvd: Stevens Creek Rd. to near Alpine Dr.	2,337
Rainbow Dr. S. Stelling Rd. to Weymoth Dr.	1,467

Verizon/MCImetro Confidential and Proprietary. May Contain Trade Secrets, or Sensitive Commercial or Financial Information. Any Unauthorized Review, Use, Disclosure, Distribution, or Copying is Prohibited.

Summary of Terms & Conditions for Innerduct

Verizon will install a manhole system with 4" HDPE conduit on select major thoroughfares in the City of Cupertino, subject to a revised wireless Master Lease Agreement (MLA). Verizon will install 3-1.25" HDPE innerducts inside the 4" conduit segments:

- 1 innerduct would be owned by City of Cupertino and labeled as such on engineering and as built documentation
- For any 3rd party companies that Cupertino allows use of innerduct the 3rd party would be allowed access under these conditions:
 - 3rd party provides engineering to Verizon for anticipated length of use
 - Enter and exit from Verizon owned Manholes – 3rd party to provide knock out or core certification location
 - 3rd party must place their own hand holes for any cable coils, splice cables, and termination points. Notify Verizon in case Verizon wishes inspector to be on-site.
 - No intercepting of 4" conduit will be allowed
 - Cables must be racked and appropriately tagged by 3rd party
 - Other inner ducts are not for use and are required for Verizon maintenance
 - Coordination of Verizon and 3rd party is required in case of fiber cut or required relocations/roadmoves